





TerraWave Solutions® 824-960 MHz 2 dBi Ceiling Mount Indoor Omnidirectional Antenna with N-Style Jack Connector

TerraWave's 2 dBi ceiling mount indoor omni antenna is designed for applications operating in 824 - 960 MHz frequency, including radio frequency identification (RFID), cellular systems, global system for mobile (GSM) communications, code-division multiple access (CDMA) systems, point-to-multipoint communications and wireless video links. Includes a screw on mount, an N-style jack connector with a 12" pigtail. Every TerraWave antenna is covered by the Company's two year TerraNet warranty program. For questions and to purchase product, contact a wireless networking solutions sales engineer at 210-375-8482, 800-851-4965 or sales@terrawave.com. Visit www.terrawave.com for additional information.

Specifications	
Model	T09020011206
Frequency Range	824 ~ 960 MHz
Bandwidth	136 MHz
Gain	2 dBi
Horizontal Beamwidth	360°
Vertical Beamwidth	30°
VSWR	≤ 1.7
Nominal Impedance	50 Ohms
Maximum Power Rating	50 Watts
Polarization	Vertical
Connector	N-Style Jack
Dimensions	4.9" D x 1.8" H
Radome	ABS
Mounting Method	Thread Screws
Operating Temperature Range	-22°F ~ 158°F

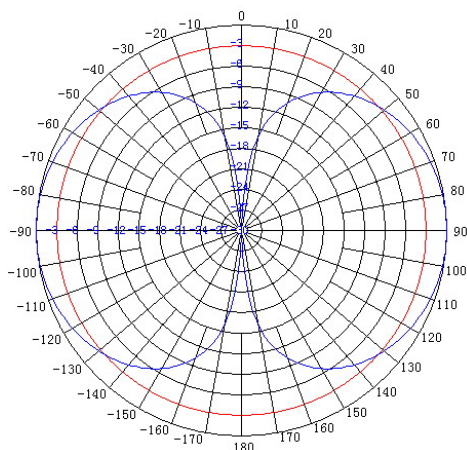

E-Plane

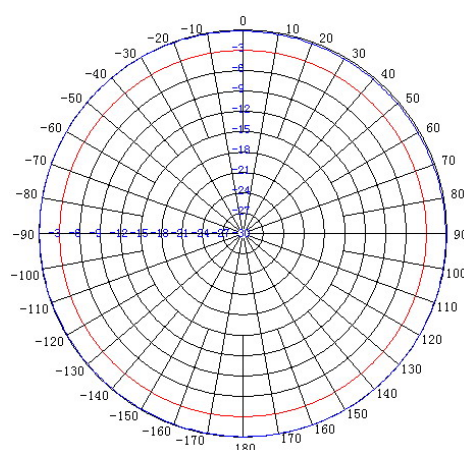

H-Plane



TerraWave Solutions® 824-960 MHz 2 dBi Ceiling Mount Indoor Omni Antenna

Mounting Bracket Information for T09020O11206

