


REVISION		
ISS	ZONE	DESCRIPTION
A-1		

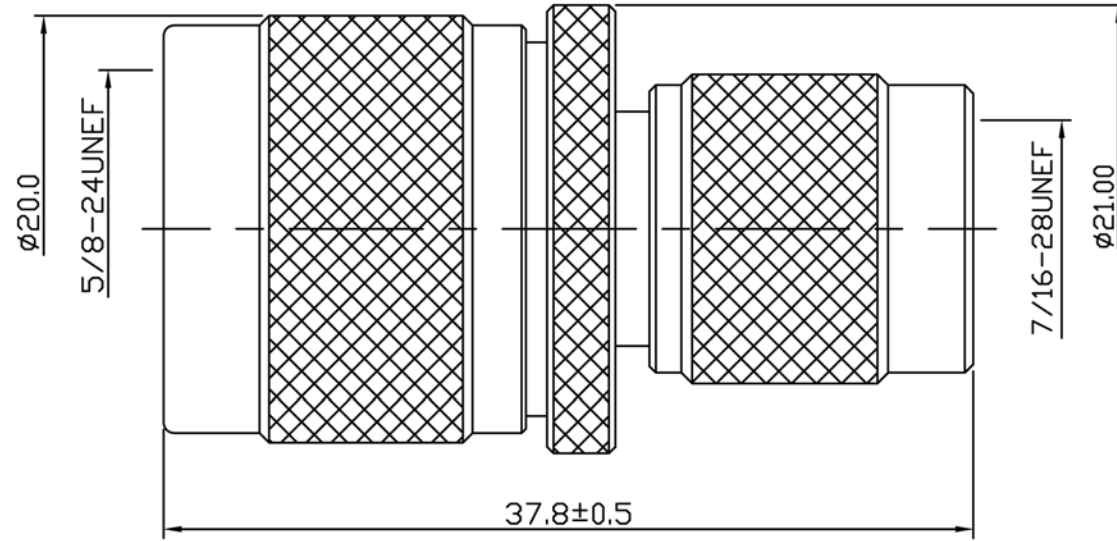

NOTE:

- 1.Impedance: 50Ω
- 2.Frequency Range: DC 0-4 GHz
- 3.V.S.W.R. : ≤ 1.3
- 4.Voltage Rating: 1500V rms
- 5.Contact Resistance: Center Contacts: 1.5 mΩ Max
Outer Contacts: 0.5 mΩ Max
- 6.Insulation Resistance: 5000 MΩ MIN.
- 7.Interface in Accordance With: MIL-STD-348A
- 8.Operating Temperature Range: -65°~165°C
- 9.ROHS Compliance.

11	SHELL	BRASS	NICKEL	1	A-0010
10	CHASSIS	BRASS	NICKEL	1	E-0062
9	GASKET	SILICONE	NONE	1	R-0007
8	WASHER	BRASS	NONE	1	G-0023
7	CENTER CONTACT	BRASS	NICKEL	1	C-0257
6	BODY	BRASS	NICKEL	1	B-0342
5	WASHER	BRASS	NICKEL	1	G-0019
4	INSULATOR	TEFLON	NONE	1	T-0201
3	GASKET	SILICONE	NONE	1	R-0004
2	SLEEVE	BRASS	GOLD	1	E-0166
1	SHELL	BRASS	NICKEL	1	A-0009

TOLERANCES				TITLE		TerraWave Solutions	
DIMENSIONS ARE IN MILLIMETER				RPTNC Plug to N-Style Plug Adapter		APPROVED	
UNLESS OTHERWISE SPECIFIED				PART NO.		DATE	
				RPTNCP-NP		CHECKED	
.X ±0.2 .XX ±0.1 .XXX ±0.05 ANGLES ±5°				DRAWN NO.		DATE	
				FILE PATH:		DRAWN	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.	SCALE	3/1	ISSUE	A-1	FILE PATH:
-----	-------------	----------	--------	------	-----------	-------	-----	-------	-----	------------