REVISION		
	ZONE	DESCRIPTION

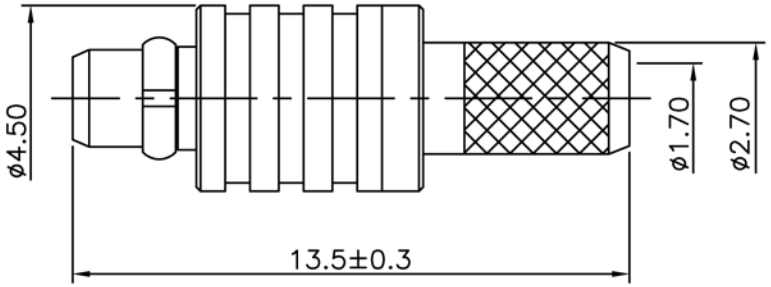

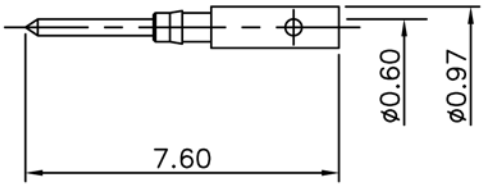

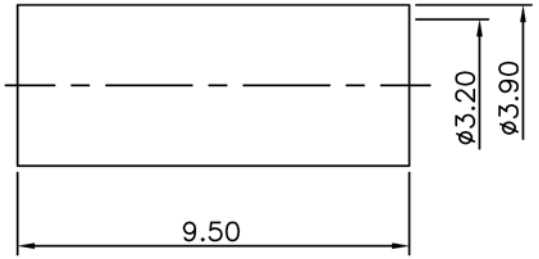

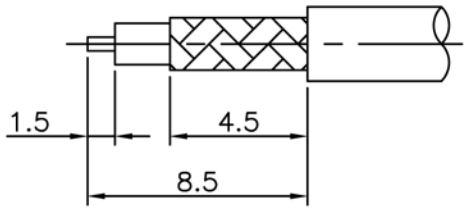

Recommended Stripping Dimensions

Electrical Data :
Impedance : 50Ω
Freauency Range: DC 0–6 GHz
Working Rating:170V rms
Contact Resistance:Center Contacts : 5.0 mΩ
Outer Contacts : 2.5 mΩ
Insulation Resistance : 1000 MΩ MIN.
V.S.W.R. : ≤ 1.4

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
6	FERRULE	BRASS	GOLD	1	M–0021
5	CENTER CONTACT	BRASS	GOLD	1	C–0258
4	BARREL	BRASS	GOLD	1	E–0063
3	BODY	BRASS	GOLD	1	B–0343
2	INSULATOR	TEFLON	NONE	1	T–0202
1	SPRING	Be Cu	GOLD	1	G–0004

TOLERANCES
DIMENSIONS ARE IN MILLIMETER
UNLESS OTHERWISE SPECIFIED
.X ±0.2
.XX ±0.1
.XXX ±0.05
ANGLES ±5°

SCALE 6/1 | ISSUE A–3

TITLE
MMCX Plug for TWS-100 Cable

PART NO.
CON-34-100

DRAWN NO.

FILE PATH:

TerraWave Solutions

APPROVED DATE

CHECKED DATE

DRAWN DATE